



B213 不锈钢防火门锁系列

B213 Fire Rated Stainless Steel Levers Series

V1.0

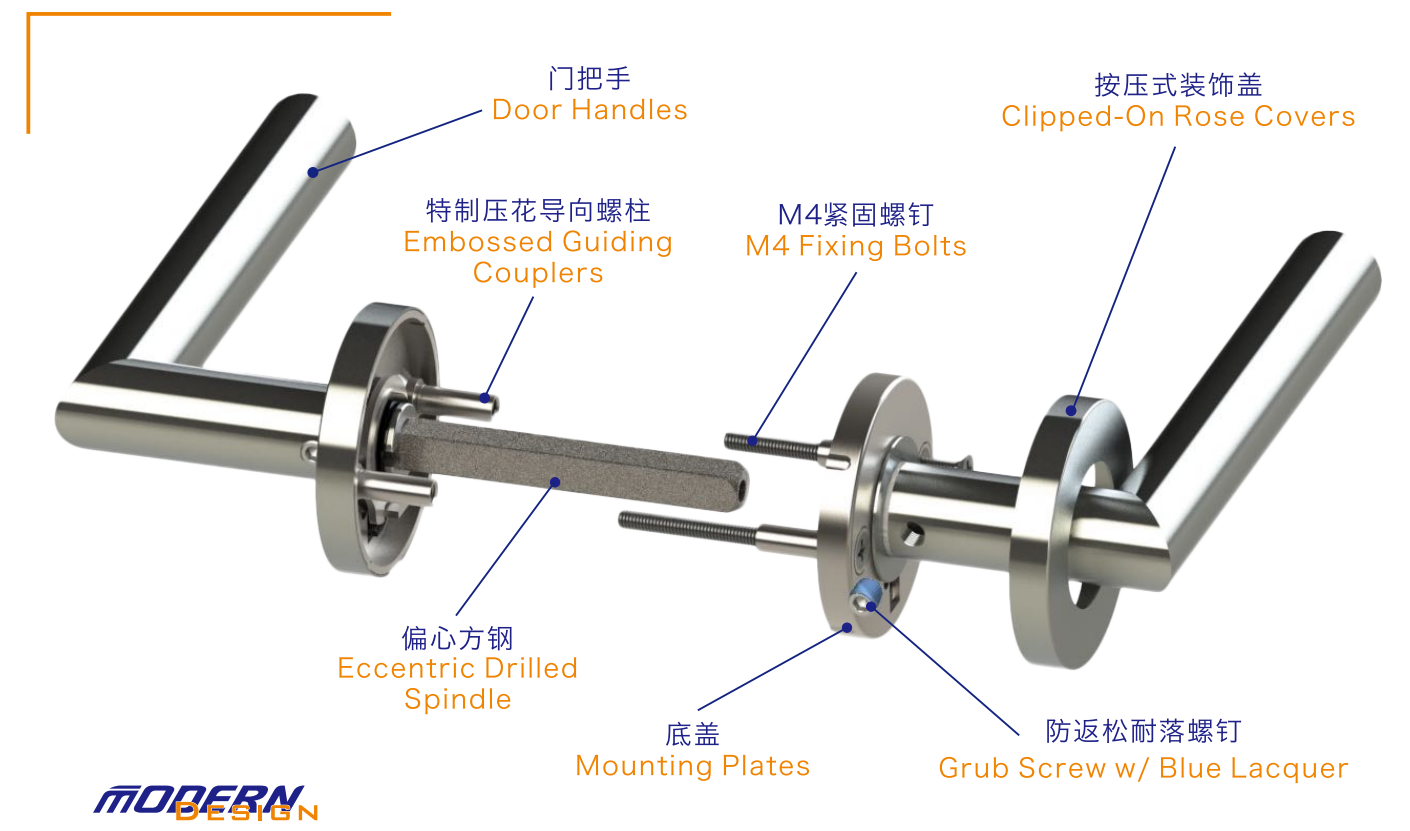

ME-B213-CR
单片式外盖结构
One-Piece Rose Version

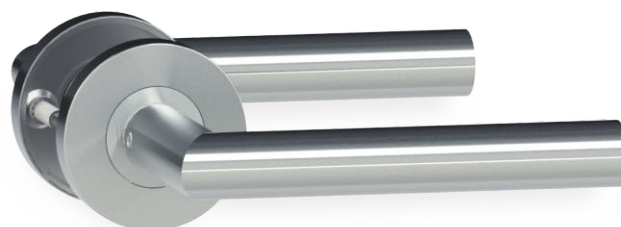

ME-B213B-CR
双片式外盖结构
Two-Piece Rose Version




ME-LA5
锁芯 (标配)
ME-LA5
Profile Cylinder
(Standard)



ME-L230FA
防火锁体 (标配)
ME-L230FA
Fire Rated
Mortise Lock
(Standard)

产品特点 Product Highlights

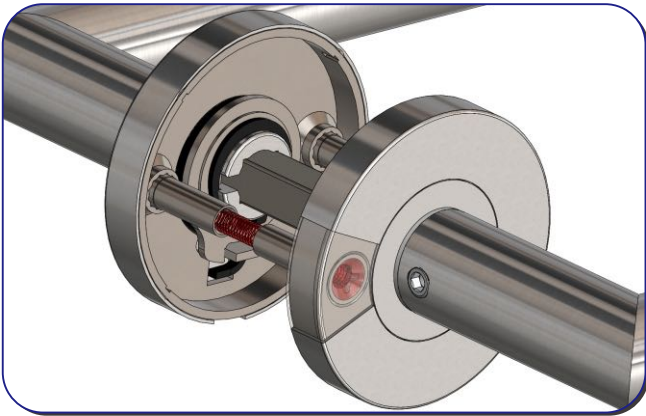

固定螺丝采用隐藏式设计，外观简洁美观。



The hidden mounting screw head design provides a clean and aesthetic appearance .

贯穿式对收螺丝能保证门内外均能高效地承受开关门产生的推拉，不容易返松。

Through-door type mounting screws can provide better support for the push/pull force generated by opening and closing the door without loosening.

导向螺柱能保持螺丝垂直，使安装更精准与方便。

The guiding couplers can keep the mounting screws straight and allow for a more precise and easier installation.

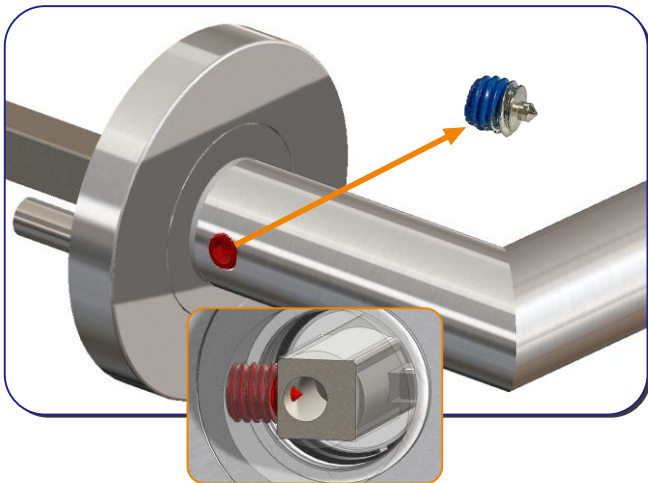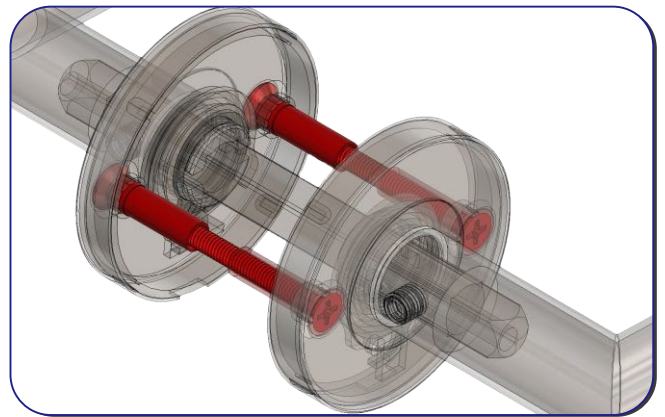


防返松耐落把手固定螺钉安装后穿透紧锁在偏心方钢上，减少把手虚位，提升把手紧实度。

The grub screw w/ blue lacquer punches through the eccentric drilled spindle and tightly secures the lever. It reduces the slack and provides a better operation feel.

把手回弹扭转弹簧采用82B耐疲劳高碳钢材质，能够通过至少20万次的疲劳测试，达到欧洲 DIN EN 1906 Grade 3 级别，提供超长使用寿命。


The lever returning torsion spring is made of 82B fatigue-resistant high-carbon steel. It passes the 200,000-cycles fatigue test and reaches the European DIN1906 Grade 3 standard.

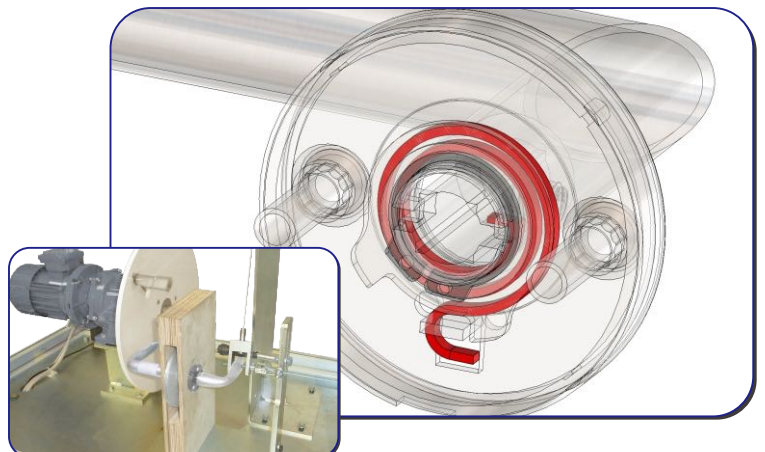

产品特点 Product Highlights




生活 · 艺术 · 品味

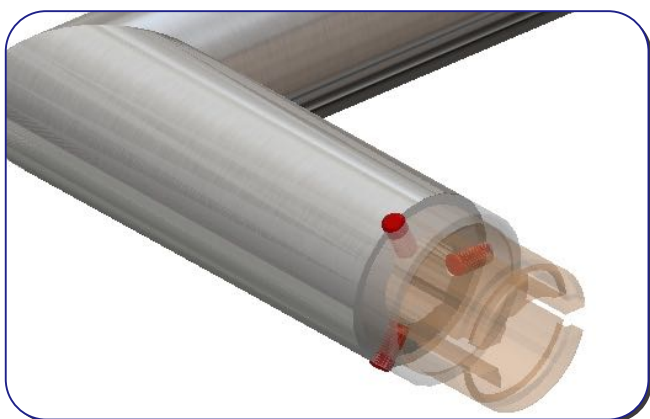


紧入式脚柱配装3颗销钉固定氩弧焊接工艺结构，把手抗扭能力高达80牛米，适合多种门重使用。

The tight-fit female part attached by 3 TIG welded pins can provide at least 80Nm of torsional strength. It is suitable for different door weights.

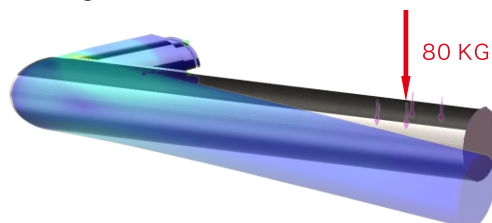

SUS 304 工业级不锈钢含有18%铬与8%镍，使其拥有超强防锈及耐腐蚀能力。把手能够通过120小时的中性盐雾测试(NSS)，在各种环境地区能够保持功能使用。(316不锈钢可选; 抗菌涂层可选)

SUS 304 industrial grade stainless steel contains 18% chromium and 8% nickel, which gives a superior anti-corrosion performance and allows it to pass the 120-hours salt spray test (NSS). (316 Stainless Steel Optional; Antibacterial-Coating Optional)

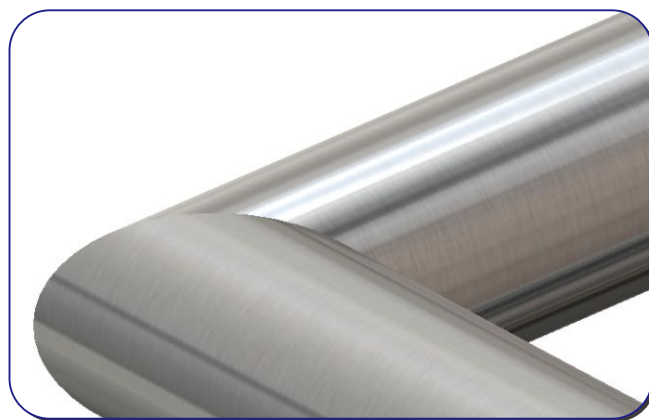

通过国家耐火构件检测，符合GB 12955-2008 防火门标准，适用于各种有防火需求的场合。(证书编号:2019081806000844)

Passed China National fire-resistant component test and conformed to GB 12955-2008 fire doorsets standard. It is suitable for a wide range fire protection usages. (Certificate No.:2019081806000844)



ME-B213B-126-CR

分体式不锈钢门锁，直角款 Stainless Steel Lever, Square Shape



生活 · 艺术 · 品味



产品特点:

- 隐藏式螺丝头
- 底盖贯穿对收螺丝 + 导向螺栓设计
- 防返松耐落螺钉 + 偏心方钢固定
- 82B耐疲劳高碳钢扭转弹簧
- 80牛米抗扭能力
- 通过120小时中性盐雾测试
- 可达到欧洲 DIN EN 1906 Grade 3 标准
- 通过 GB 12955-2008 防火测试认证

Highlights:

- Hidden mounting screw heads
- Through-door type mounting screws with guiding couplers
- Grub screws with blue lacquer attached to eccentric drilled spindle
- 82B fatigue-resistant torsion spring
- 80 Nm torsional strength
- Passed 120-hour salt spray test
- Satisfies European DIN EN 1906 Grade 3 standard
- Conformed to GB 12955-2008 fire rating




Finishes: 颜色
Brushed S.S 拉丝砂光
Powder Black 黑色喷粉



ME-LA5 锁芯 (标配)
ME-LA5 Profile Cylinder (Standard)



ME-L230FA 防火锁体 (标配)
ME-L230FA Fire Rated Mortise Lock (Standard)

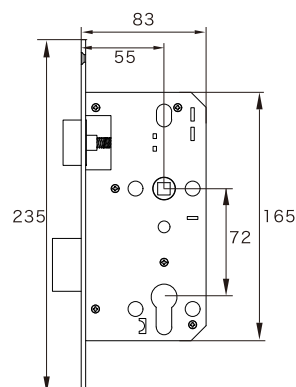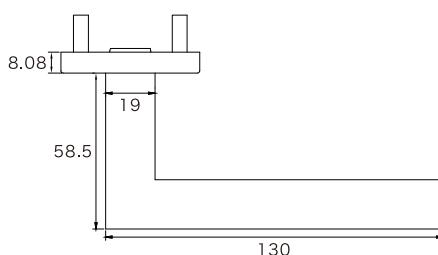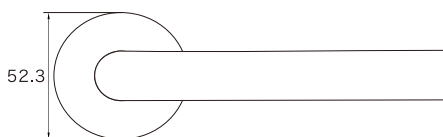

产品参数

- 结构: 分体锁
- 材质: 工业级304不锈钢 (316不锈钢可选)
- 表面处理: 拉丝砂光, 黑色喷粉
- 执行标准: QB/T2474-2000
- 防火标准: GB 12955-2008
- 适用范围: 木质门, 金属门, 防火门, 等。

标准配置

- 把手主件: 一对把手
一对把手装饰盖
一对锁芯装饰盖
- 标配锁体: ME-L230FA (55x72mm)
- 标配锁芯: ME-LA5 (70mm)
- 配件: 方钢, 扣板, 塑料扣盒, 安装螺钉

安装尺寸

- 门边距: 55mm (60mm可选)
- 中心距: 72mm
- 适用门厚: 38-50mm
- 紧固螺丝孔距: 38mm

Product Specifications

- Structure: lever-on-rose
- Material: industrial grade 304 stainless steel (316 S.S optional)
- Finish: Brushed S.S, Powder Black
- Standard: QB/T2474-2000
- Fire Rating: GB 12955-2008
- Application: wooden door, metal door, fire door, etc.

Standard Components

- Lever Parts: 1 pair of door levers
1 pair of lever roses
1 pair of profile cylinder roses
- Standard lock body: ME-L230FA (55x72mm)
- Standard lock cylinder: ME-LA5 (70mm)
- Accessories: eccentric drilled spindle, strike plate, strike plate plastic housing, installation screws

Installation Dimensions

- Backset: 55mm (60mm optional)
- Center Dist.: 72mm
- Door Thickness: 38-50mm
- Mounting Screws Dist.: 38mm

在不影响功能质量前提下, 摩登五金有适当改动尺寸、外形而不另行通知的权利, 产品与印刷目录有少许色差, 产品图片尺寸可以实物为准。
Under the premise of not affecting the quality and functions of the products, Modern Hardware has the right to modify the size and appearance without prior notice. The colors and dimensions of the products might be different from what is printed on this catalogue.

ME-B213-38-CR

分体式不锈钢门锁，双弯款 Stainless Steel Lever, U-Shape



生活 · 艺术 · 品味



产品特点:

- 隐藏式螺丝头
- 底盖贯穿对收螺丝 + 导向螺栓设计
- 防返松耐落螺钉 + 偏心方钢固定
- 82B耐疲劳高碳钢扭转弹簧
- 80牛米抗扭能力
- 通过120小时中性盐雾测试
- 可达到欧洲 DIN EN 1906 Grade 3 标准
- 通过 GB 12955-2008 防火测试认证

Highlights:

- Hidden mounting screw heads
- Through-door type mounting screws with guiding couplers
- Grub screws with blue lacquer attached to eccentric drilled spindle
- 82B fatigue-resistant torsion spring
- 80 Nm torsional strength
- Passed 120-hour salt spray test
- Satisfies European DIN EN 1906 Grade 3 standard
- Conformed to GB 12955-2008 fire rating




Finishes:
颜色
Brushed S.S
拉丝砂光



ME-LA5 锁芯 (标配)
ME-LA5 Key Cylinder (Standard)



ME-L230FA 防火锁体 (标配)
ME-L230FA Fire Rated
Mortise Lock (Standard)

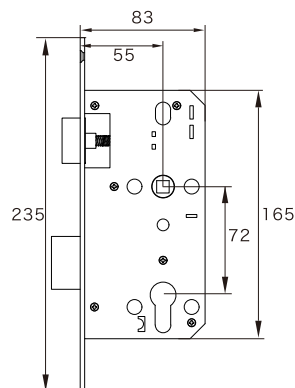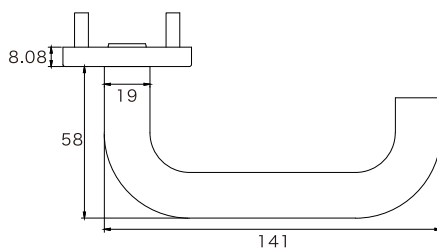

产品参数

- 结构: 分体锁
- 材质: 工业级304不锈钢 (316不锈钢可选)
- 表面处理: 拉丝砂光
- 执行标准: QB/T2474-2000
- 防火标准: GB 12955-2008
- 适用范围: 木质门, 金属门, 防火门, 等。

标准配置

- 把手主件: 一对把手
一对把手装饰盖
一对锁芯装饰盖
- 标配锁体: ME-L230FA (55x72mm)
- 标配锁芯: ME-LA5 (70mm)
- 配件: 方钢, 扣板, 塑料扣盒, 安装螺钉

安装尺寸

- 门边距: 55mm (60mm可选)
- 中心距: 72mm
- 适用门厚: 38-50mm
- 紧固螺丝孔距: 38mm

Product Specifications

- Structure: lever-on-rose
- Material: industrial grade 304 stainless steel (316 S.S optional)
- Finish: Brushed S.S
- Standard: QB/T2474-2000
- Fire Rating: GB 12955-2008
- Application: wooden door, metal door, fire door, etc.

Standard Components

- Lever Parts: 1 pair of door levers
1 pair of lever roses
1 pair of profile cylinder roses
- Standard lock body: ME-L230FA (55x72mm)
- Standard lock cylinder: ME-LA5 (70mm)
- Accessories: eccentric drilled spindle, strike plate, strike plate plastic housing, installation screws

Installation Dimensions

- Backset: 55mm (60mm optional)
- Center Dist.: 72mm
- Door Thickness: 38-50mm
- Mounting Screws Dist.: 38mm

ME-B213-47-CR

分体式不锈钢门锁，单弯款 Stainless Steel Lever, L-Shape



生活 · 艺术 · 品味



Finishes:
颜色
Brushed S.S
拉丝砂光

产品特点:

- 隐藏式螺丝头
- 底盖贯穿对收螺丝 + 导向螺栓设计
- 防返松耐落螺钉 + 偏心方钢固定
- 82B耐疲劳高碳钢扭转弹簧
- 80牛米抗扭能力
- 通过120小时中性盐雾测试
- 可达到欧洲 DIN EN 1906 Grade 3 标准
- 通过 GB 12955-2008 防火测试认证

Highlights:




- Hidden mounting screw heads
- Through-door type mounting screws with guiding couplers
- Grub screws with blue lacquer attached to eccentric drilled spindle
- 82B fatigue-resistant torsion spring
- 80 Nm torsional strength
- Passed 120-hour salt spray test
- Satisfies European DIN EN 1906 Grade 3 standard
- Conformed to GB 12955-2008 fire rating



ME-LA5 锁芯 (标配)
ME-LA5 Key Cylinder (Standard)



ME-L230FA 防火锁体 (标配)
ME-L230FA Fire Rated Mortise Lock (Standard)

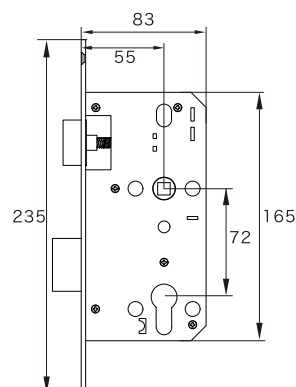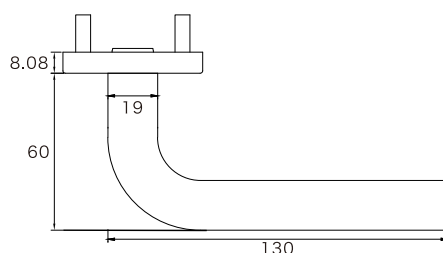

产品参数

- 结构: 分体锁
- 材质: 工业级304不锈钢 (316不锈钢可选)
- 表面处理: 拉丝砂光
- 执行标准: QB/T2474-2000
- 防火标准: GB 12955-2008
- 适用范围: 木质门, 金属门, 防火门, 等。

标准配置

- 把手主件: 一对把手
一对把手装饰盖
一对锁芯装饰盖
- 标配锁体: ME-L230FA (55x72mm)
- 标配锁芯: ME-LA5 (70mm)
- 配件: 方钢, 扣板, 塑料扣盒, 安装螺钉

安装尺寸

- 门边距: 55mm (60mm可选)
- 中心距: 72mm
- 适用门厚: 38-50mm
- 紧固螺丝孔距: 38mm

Product Specifications

- Structure: lever-on-rose
- Material: industrial grade 304 stainless steel (316 S.S optional)
- Finish: Brushed S.S
- Standard: QB/T2474-2000
- Fire Rating: GB 12955-2008
- Application: wooden door, metal door, fire door, etc.

Standard Components

- Lever Parts: 1 pair of door levers
1 pair of lever roses
1 pair of profile cylinder roses
- Standard lock body: ME-L230FA (55x72mm)
- Standard lock cylinder: ME-LA5 (70mm)
- Accessories: eccentric drilled spindle, strike plate, strike plate plastic housing, installation screws

Installation Dimensions

- Backset: 55mm (60mm optional)
- Center Dist.: 72mm
- Door Thickness: 38-50mm
- Mounting Screws Dist.: 38mm

在不影响功能质量前提下, 摩登五金有适当改动尺寸、外形而不另行通知的权利, 产品与印刷目录有少许色差, 产品图片尺寸可以实物为准。
Under the premise of not affecting the quality and functions of the products, Modern Hardware has the right to modify the size and appearance without prior notice. The colors and dimensions of the products might be different from what is printed on this catalogue.



广州现代五金制品有限公司

GUANGZHOU MODERN HARDWARE PRODUCT CO., LTD

NO.412, GUANGZHU ROAD, GUANGZHOU, GUANGDONG, CHINA

广东省广州市南沙区广珠路412号

Tel/电话: 020-84993206

Fax/传真: 020-84993114

Http://www.modern.gd.cn E-mail: modern@modern.gd.cn